

GAFFER STAGE TAPE (210 µm)

KEY FEATURES


- It's matte finish avoids light reflections in audiovisual recordings by absorbing the light and reflection incident on the tape.
- Excellent resistance to weather and corrosion.
- Excellent level of adherence.
- Highly adaptable to uneven surfaces.
- Can be torn by hand.
- Good dimensional stability of the product.
- It's unwinding is silent and controlled.
- It's removal from the application surface does not generate adhesive mass residues.



Self-Adhesive Tape composed with a cotton fabric backing coated by a rubber adhesive.

The tape is designed to securely lay cables on **stages, studios, exhibition centers and mark positions on stages** avoiding light reflections from the incident focus.

Available colors:



PRODUCT COMPOSITION



CARRIER

Cotton fabric

ADHESIVE TYPE

Natural rubber

TECHNICAL CHARACTERISTICS

ADHESIVE PROPERTIES	VALUES	METHOD
Total thickness	210 µm	ASTM D-3652
Tensile strength	30 N/cm	ASTM D-3759
Elongation at break	110 %	ASTM D-3759
Adhesion to steel	3,2 N/cm	ASTM D-3330
Rolling Tack Ball	< 20 mm	ASTM D-3121
Shear strength	> 30 h	ASTM D-3654
Application temperature range	[+10°C - +40°C]	INTERNAL
Service temperature range	[-10°C - +60°C]	INTERNAL (cycles of 1h)

The given values are typical values obtained in specific conditions of temperature, loads and adhesive surface determined by norm. The user must determine if the tape is suitable for their specific application by testing the product. In case help is needed, ATyT will provide you with professional customer support and recommendation, indicating which tape suits best your needs.




APPLICATIONS

- Can be used to temporarily fasten light fixtures, fasten cables and wires, mark and label equipment boxes.
- Used in splicing for dance floors and cable bundling.
- **High visibility matte colors** for marking stairs, exits or sets.
- Used both on stage and backstage.
- Ideal for events of all kinds (theater, opera, concerts, fairs, etc.).
- Marking of positions on the ground to facilitate the processes.



Surfaces to which tape is applied should be clean, dry and free of grease, oil, moisture, dirt and other contaminants. Sufficient pressure should be applied during application. If not, it will affect the properties and appearance of the product.

STANDARD PRESENTATION:

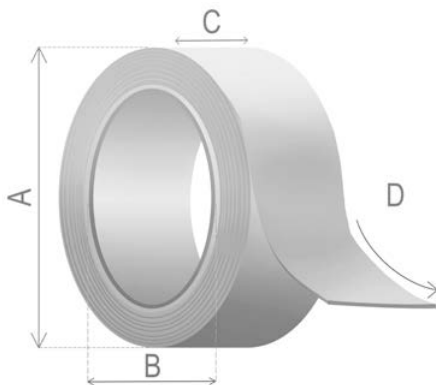

Outer diameter (A)	143 mm			
Core diameter (B)	76 mm			
Width (C)	12 mm	25 mm	38 mm	50 mm
Length (D)	50 m			

Any other length and width available on request. Check conditions. The product can be supplied with a multitude of different types of presentation (see conditions). Among others, we highlight: the personalization of the core, the personalized plastic packaging, the shrink wrapping and the labeling of the tape.



STORAGE CONDITIONS

For better conservation of properties, product should be stored in its original packaging, between 20 and 30° C, preserved from direct exposure to sun and moisture. It is recommended to use the product within 12 months, since dispatching date.



GENERAL WARRANTY CONDITIONS

ATyT recommends applying the product only on clean, dry and free of grease, oil or other contaminants surfaces.

Product properties are typical and should not be considered specifications. They are based on tests believed to be reliable and performed conformance with recommended test methods. Values are expected to be used for comparison purposes only; they do not represent a manufacturer guarantee. Before using, the client should determine whether the product is fit for a particular purpose and for the user's method of application.

