

#SA-PE50SL-508-AMNE
#SA-PE50SL-508-ROBL
#SA-PE50SL-508-AZBL



PE BARRICADE WARNING TAPE

KEY FEATURES

- Easy application of the product.
- Clearly indicates the area to be cordoned off providing an excellent visualization of the restricted zone.
- Excellent resistance to external agents such as abrasion, corrosion and moisture.
- **Conforms to 1907/2006 REACH regulation.**
- Available in standard or customized printings.
- Suitable for its outdoor use.
- Will not shrink once the product would be applied.



LDPE non-adhesive barricade warning tape used for the marking of corridors, special or hazardous areas, cordoning off and construction sites, and marking restricted or dangerous areas that cannot be overpassed by unauthorized people.

This type of product is available with standard printings for applications requiring cordoning off areas to indicate the danger or risk of potential accidents that may occur in the areas of application. Besides, we offer the possibility to convert the material with customized printings based on the design provided by the customer.

Available colors:



PRODUCT COMPOSITION



CARRIER
LDPE Film

TECHNICAL CHARACTERISTICS

ADHESIVE PROPERTIES	VALUES	METHOD
Gauge	200	INTERNAL
Tensile strength	16 N/cm	ASTM D-3759
Elongation at break	150 %	ASTM D-3759
Application temperature range	[+10°C - +40°C]	INTERNAL
Service temperature range	[-20°C - +80°C]	INTERNAL (Cycles of 1 h)

The given values are typical values obtained in specific conditions of temperature, loads and adhesive surface determined by norm. The user must determine if the tape is suitable for their specific application by testing the product. In case help is needed, ATyT will provide you with professional customer support and recommendation, indicating which tape suits best your needs.






APPLICATIONS

- Signposting of risk areas, accidents or emergencies.
- Marking of sportive or cultural events.
- Identification of dangerous or restricted areas.
- Identification of risk areas, for electrical work, telecommunications, water channeling, etc.



Surfaces to which tape is applied should be clean, dry and free of grease, oil, moisture, dirt and other contaminants. Sufficient pressure should be applied during application. If not, it will affect the properties and appearance of the product.

STANDARD PRESENTATION:

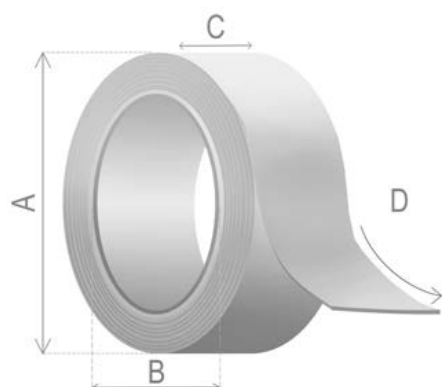

Outer diameter (A)	116 mm		141 mm	
Core diameter (B)	76 mm			
Width (C)	50 mm	70 mm		100 mm
Length (D)	100 m		200 m	

Any other length and width available on request. Check conditions.
The product can be supplied with a multitude of different types of presentation (see conditions). Among others, we highlight: the personalization of the core, the customized plastic packaging, the shrink wrapping and the labeling of the tape.



STORAGE CONDITIONS

For better conservation of properties, product should be stored in its original packaging, between 20 and 30° C, preserved from direct exposure to sun and moisture. It is recommended to use the product within 12 months, since dispatching date.



GENERAL WARRANTY CONDITIONS

ATyT S.L. recommends applying the product only on clean, dry and free of grease, oil or other contaminants surfaces.

Product properties are typical and should not be considered specifications. They are based on tests believed to be reliable and performed conformance with recommended test methods. Values are expected to be used for comparison purposes only; they do not represent a manufacturer guarantee. Before using, the client should determine whether the product is fit for a particular purpose and for the user's method of application.

