

SELF-ADHESIVE FIBERGLASS JOINT TAPE (36)



KEY FEATURES

- Resistant to moisture and other external agents.
- Easy to apply due to its self-adhesive surface.
- High mechanical strength and flexibility.
- Compatible with various types of joint compounds.
- Does not deform or shrink over time.
- Tolerant to extreme temperatures.
- Ideal tool for applications and installations involving gypsum or drywall panels.

The fiberglass joint tape, composed of a fiberglass mesh backing and coated with an acrylic adhesive on its reverse side, is a reinforcement material designed to join and strengthen joints on drywall or gypsum board surfaces.

Its main functionality and advantage lie in its crack resistance, providing a durable and uniform finish.

Available colors:

PRODUCT COMPOSITION



CARRIER
Fiberglass mesh (8x8 mm)


ADHESIVE
Acrylic

TECHNICAL CHARACTERISTICS

ADHESIVE PROPERTIES	VALUES	METHOD
Mesh Density	(45x2x2) tex (Wrap)	ASTM D-3775
	90 tex (Weft)	
Total Weight	55 g/m ²	ASTM D-3652
Adhesive Weight	18 g/m ²	ASTM D-3652
Density (threads/inch)	8 (Wrap)	INTERNAL
	8 (Weft)	
Tensile Strength	> 100 N/cm (Wrap)	ASTM D-3759
	> 120 N/cm (Weft)	

The given values are typical values obtained in specific conditions of temperature, loads and adhesive surface determined by norm. The user must determine if the tape is suitable for their specific application by testing the product. In case help is needed, ATyT will provide you with professional customer support and recommendation, indicating which tape suits best your needs.



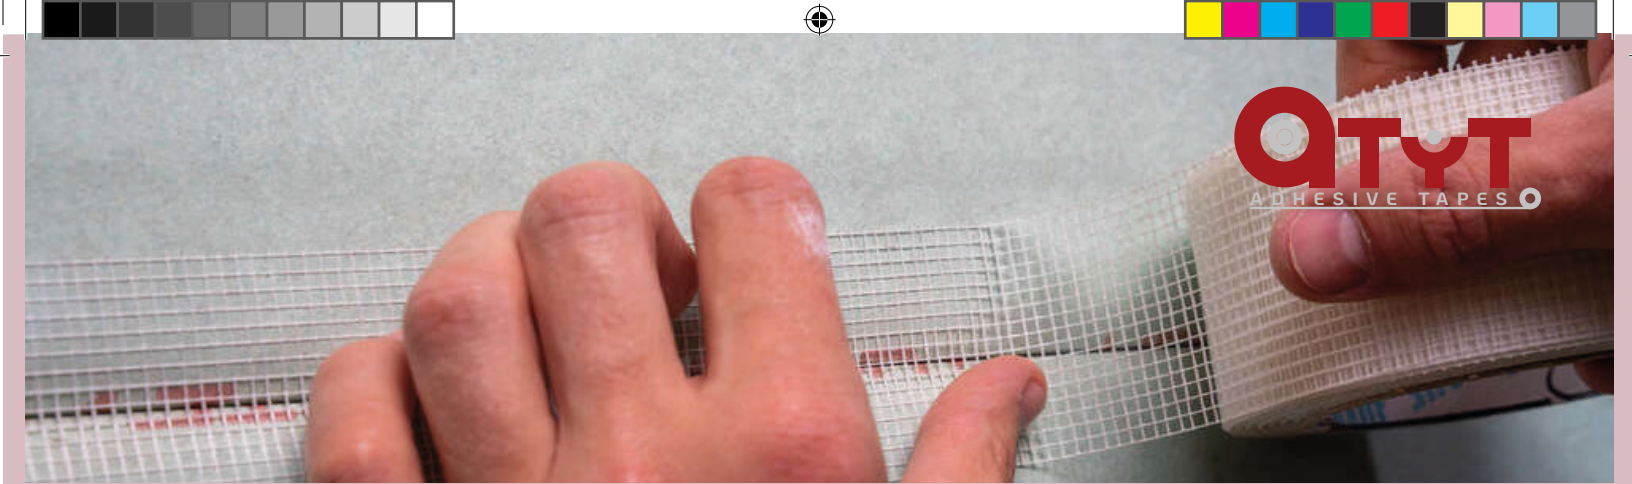


APPLICATIONS

- Joint reinforcement in drywall/plasterboard panels.
- Crack repair on walls and ceilings.
- Additional reinforcement on corners and edges.
- Applications in residential and commercial construction.
- Renovation and maintenance projects.



Surfaces to which tape is applied should be clean, dry and free of grease, oil, moisture, dirt and other contaminants. Sufficient pressure should be applied during application. If not, it will affect the properties and appearance of the product.

STANDARD PRESENTATION:

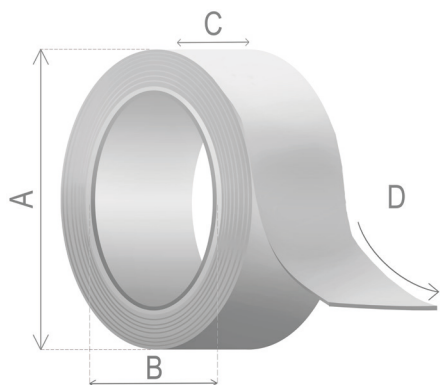

Outer diameter (A)	65 mm	82 mm	105 mm
Core diameter (B)	38 mm		
Width (C)	48 mm	75 mm	100 mm
Length (D)	45 m	90 m	150 m

Any other length and width available on request. Check conditions.
The product can be supplied with a multitude of different types of presentation (see conditions). Among others, we highlight: the personalization of the core, the customized plastic packaging, the shrink wrapping and the labeling of the tape.



STORAGE CONDITIONS

For better conservation of properties, product should be stored in its original packaging, between 20 and 30° C, preserved from direct exposure to sun and moisture. It is recommended to use the product within 12 months, since dispatching date.



GENERAL WARRANTY CONDITIONS

ATyT recommends applying the product only on clean, dry and free of grease, oil or other contaminants surfaces.

Product properties are typical and should not be considered specifications. They are based on tests believed to be reliable and performed conformance with recommended test methods. Values are expected to be used for comparison purposes only; they do not represent a manufacturer guarantee. Before using, the client should determine whether the product is fit for a particular purpose and for the user's method of application.

