

PAPER JOINT TAPE (36)


KEY FEATURES

- High adherence to joint compounds.
- Tear-resistant and easy to handle.
- Compatible with automatic and manual tools.
- The paper backing features micro perforations for better adjustment to application surfaces.
- Ensures a uniform finish without deformation.
- Eco-friendly and recyclable material.



The paper joint tape, composed of a cellulose paper backing with micro perforations that prevent air bubbles, is a strong and flexible tape designed to reinforce the joints between gypsum boards.

This product offers a smooth and professional finish, making it ideal for construction and renovation projects where high-quality, uniform finishes are required.

Available colors: 

PRODUCT COMPOSITION



CARRIER
Micro-perforated cellulose paper, 140 g/m²

TECHNICAL CHARACTERISTICS

ADHESIVE PROPERTIES	VALUES	METHOD
Total Thickness	210 µm	ASTM D-3652
Total Weight	140 g/m ²	ASTM D-3652
Density	0,62 g/cm ³	ASTM D-3652
Tensile Strength	7.28 kN/m (Warp)	ASTM D-3759
	4.20 kN/m (Weft)	

The given values are typical values obtained in specific conditions of temperature, loads and adhesive surface determined by norm. The user must determine if the tape is suitable for their specific application by testing the product. In case help is needed, ATyT will provide you with professional customer support and recommendation, indicating which tape suits best your needs.




APPLICATIONS

- Reinforcing joints in gypsum boards.
- Repairing small to medium cracks.
- Finishing corners and edges with metal corner beads.
- Interior construction and residential projects.
- Preparing surfaces for painting or texturing.



Surfaces to which tape is applied should be clean, dry and free of grease, oil, moisture, dirt and other contaminants. Sufficient pressure should be applied during application. If not, it will affect the properties and appearance of the product.

STANDARD PRESENTATION:

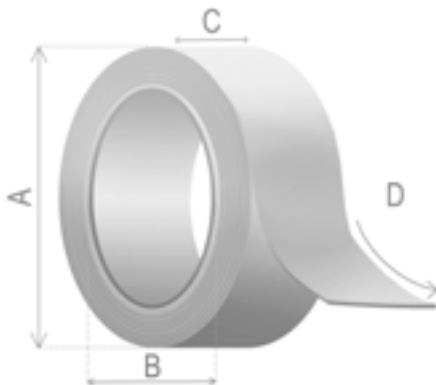

Outer diameter (A)	108 mm	115 mm	135 mm
Core diameter (B)	76 mm		
Width (C)	50 mm	75 mm	100 mm
Length (D)	50 m	75 m	150 m

Any other length and width available on request. Check conditions. The product can be supplied with a multitude of different types of presentation (see conditions). Among others, we highlight: the personalization of the core, the customized plastic packaging, the shrink wrapping and the labeling of the tape.



STORAGE CONDITIONS

For better conservation of properties, product should be stored in its original packaging, between 20 and 30° C, preserved from direct exposure to sun and moisture. It is recommended to use the product within 12 months, since dispatching date.



GENERAL WARRANTY CONDITIONS

ATyT recommends applying the product only on clean, dry and free of grease, oil or other contaminants surfaces.

Product properties are typical and should not be considered specifications. They are based on tests believed to be reliable and performed conformance with recommended test methods. Values are expected to be used for comparison purposes only; they do not represent a manufacturer guarantee. Before using, the client should determine whether the product is fit for a particular purpose and for the user's method of application.

