

PERFORATED PVC JOINT TAPE (36)

KEY FEATURES

- Can be produced with acrylic adhesive if required.
- Resistant to water and aging.
- High flexibility to adapt to various surfaces.
- Resistant to chemicals and abrasion.
- Easy to cut and apply.
- Provides durable adhesion under diverse environmental conditions.
- Suitable for indoor and outdoor applications.



PVC joint tape is a durable and flexible material designed for joining surfaces exposed to adverse conditions, such as moisture or impacts, offering a clean and resistant finish.

It is primarily used for repairing damaged edges in gypsum structures.

Available colors:

PRODUCT COMPOSITION



CARRIER
High-density PVC laminated with a paper film on its back

TECHNICAL CHARACTERISTICS

ADHESIVE PROPERTIES	VALUES	METHOD
Total Thickness	800 µm	ASTM D-3652
Tensile Strength	> 400 N/cm	ASTM D-3759
Service Temperature Range	[-20°C to +70°C]	INTERNAL

The given values are typical values obtained in specific conditions of temperature, loads and adhesive surface determined by norm. The user must determine if the tape is suitable for their specific application by testing the product. In case help is needed, ATyT will provide you with professional customer support and recommendation, indicating which tape suits best your needs.






APPLICATIONS

- Joining surfaces in moist or wet environments.
- Repairing damaged edges in gypsum structures.
- Reinforcing corners and edges in humid areas.
- Temporary sealing of exposed surfaces.
- Industrial uses or applications in high-traffic areas.



Surfaces to which tape is applied should be clean, dry and free of grease, oil, moisture, dirt and other contaminants. Sufficient pressure should be applied during application. If not, it will affect the properties and appearance of the product.

STANDARD PRESENTATION:

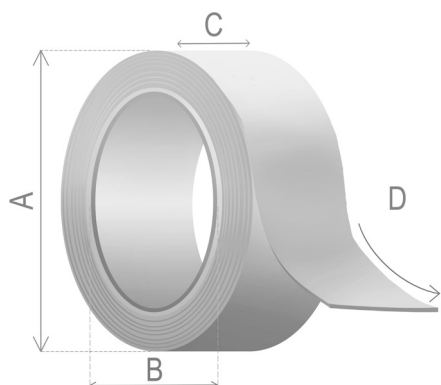

Outer diameter (A)	105 mm	125 mm
Core diameter (B)	76 mm	
Width (C)	50 mm	
Length (D)	15 m	30 m

Any other length and width available on request. Check conditions. The product can be supplied with a multitude of different types of presentation (see conditions). Among others, we highlight: the personalization of the core, the customized plastic packaging, the shrink wrapping and the labeling of the tape.



STORAGE CONDITIONS

For better conservation of properties, product should be stored in its original packaging, between 20 and 30° C, preserved from direct exposure to sun and moisture. It is recommended to use the product within 12 months, since dispatching date.



GENERAL WARRANTY CONDITIONS

ATyT recommends applying the product only on clean, dry and free of grease, oil or other contaminants surfaces.

Product properties are typical and should not be considered specifications. They are based on tests believed to be reliable and performed conformance with recommended test methods. Values are expected to be used for comparison purposes only; they do not represent a manufacturer guarantee. Before using, the client should determine whether the product is fit for a particular purpose and for the user's method of application.

